

# KANTILAL CHIMANLAL

AHMEDABAD  
SINCE-1913

## CAST IRON Y TYPE STRAINER

SCREWED

### SPECIFICATIONS

'SANT' Cast Iron Y Type Strainer  
Stainless Steel/Brass Perforated Sheet Screen  
Screwed Female Ends (BSP)  
Suitable for Maximum Steam Working Pressure 150 Psig  
Maximum Working Temperature 220°C

### TESTING & CERTIFICATION

Test Pressure 300 Psig Hyd.

Test Certificate in Form IIIC as per IBR is furnished with every supply.

### MATERIALS


Components	Material	Material Specification
Body, Bonnet	Cast Iron	IS:210 Gr.FG200
Drain Plug for 25mm & above	Bronze	IBR 282(a)(iv) Gr.B
Strainer	S.S./Brass	AISI 304/IS:410
Gasket	Compressed Asbestos Fibre	IS:2712 Gr.C
Fasteners	Mild Steel	IS:226

### DIMENSIONS (In mm)

Nominal Size	F		
15	76		
20	98		
25	133		
40	178		
50	222		

SANT

CI 7B

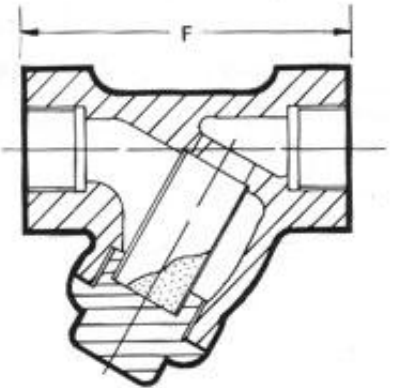

### Application

Water	Oil	Gas	Steam
●	●		●

KANTILAL CHIMANLAL  
662/45, Kapasia Bazaar  
Railwaypura, Ahmedabad-3800 02  
Gujarat (INDIA)

Ph.: +91 79 2217 0041 / 80  
Fax: +91 79 2212 1863  
Mobile: +91 98795 15172  
E-mail : kc@kantilalchimanlal.net

' For Guaranteed Trouble Free Service '