

KANTILAL CHIMANLAL

AHMEDABAD
SINCE-1913

CAST STEEL GLOBE VALVE

ND 40

SPECIFICATIONS

'SANT' Cast Steel Globe Stop Valve
Bolted Bonnet
Outside Screw & Yoke Type
Rising Stem
Renewable Stainless Steel Trim
Handwheel Operated
Flanged Ends as per BS:4504 Part 1 Table 40/1 identical to DIN 2545 RF
Nominal Pressure Rating PN 40 ,Conforming to BS:5160/DIN 2401
Note : Yoke Bush shall be of Al/Br

TESTING & CERTIFICATION

Body Test Pressure 76 bar g (1100 Psig) Hyd.
Backseat & Seat Test Pressure 40 bar g (580 Psig) Hyd.
Test Certificate in Form IIIC as per IBR is furnished with every supply.

MATERIALS


Components	Material	Material Specification
Body, Bonnet, Gland Flange	Cast Carbon Steel	ASTM A 216 Gr.WCB
Body Seat Ring, Valve Disc, Disc Stem Nut, Backseat Bush, Yoke Bush, Stem, Gland	Stainless Steel	AISI 410
Gasket	Compressed Asbestos Fibre	IS:2712 Gr.C
Gland Packing	Graphited Asbestos	with Metal Reinforcement
Handwheel	Cast Iron	IS:210 Gr.FG200
Fasteners	Mild Steel	IS:226

DIMENSIONS (In mm)

Nominal Size	F	H	W
15	130	200	125
20	150	205	125
25	160	240	160
32	180	245	160
40	200	300	200
50	230	300	200
65	290	350	250
80	310	360	250
100	350	405	315
125	400	440	315
150	480	580	400
200	600	640	400

SANT

CS 1

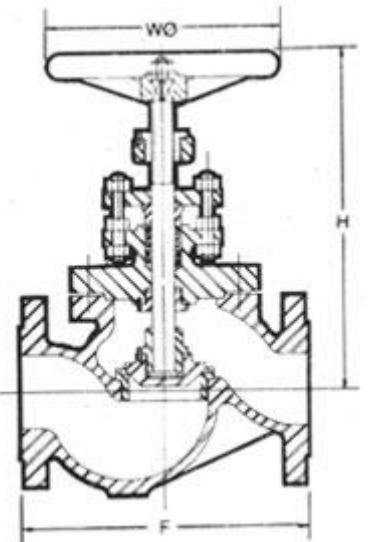

Application

Water	Oil	Gas	Steam
●	●		●

KANTILAL CHIMANLAL
662/45, Kapasia Bazaar
Railway pura, Ahmedabad-3800 02
Gujarat (INDIA)

Ph.: +91 79 2217 0041 / 80
Fax: +91 79 2212 1863
Mobile: +91 98795 15172
E-mail : kc@kantilalchimanlal.net

' For Guaranteed Trouble Free Service '